
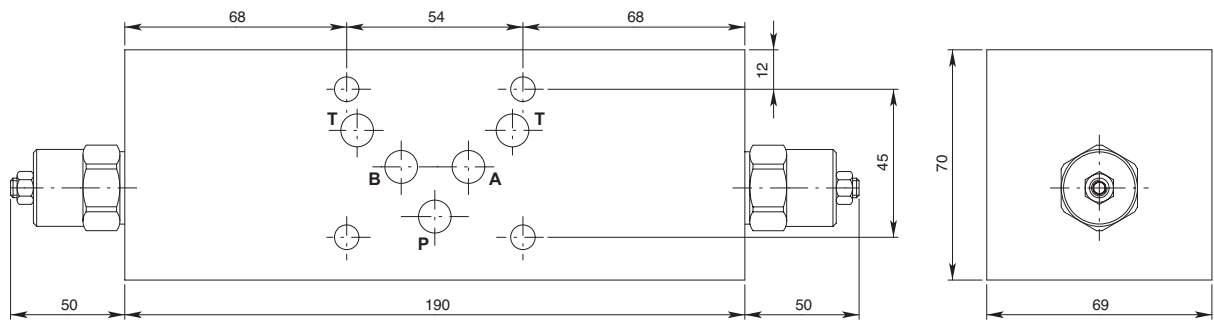



Valvola OVERCENTER doppio effetto modulare - luce 10
Dual OVERCENTER valve sandwich mounting - "NG10"
mod. OVC - DE - F - C5

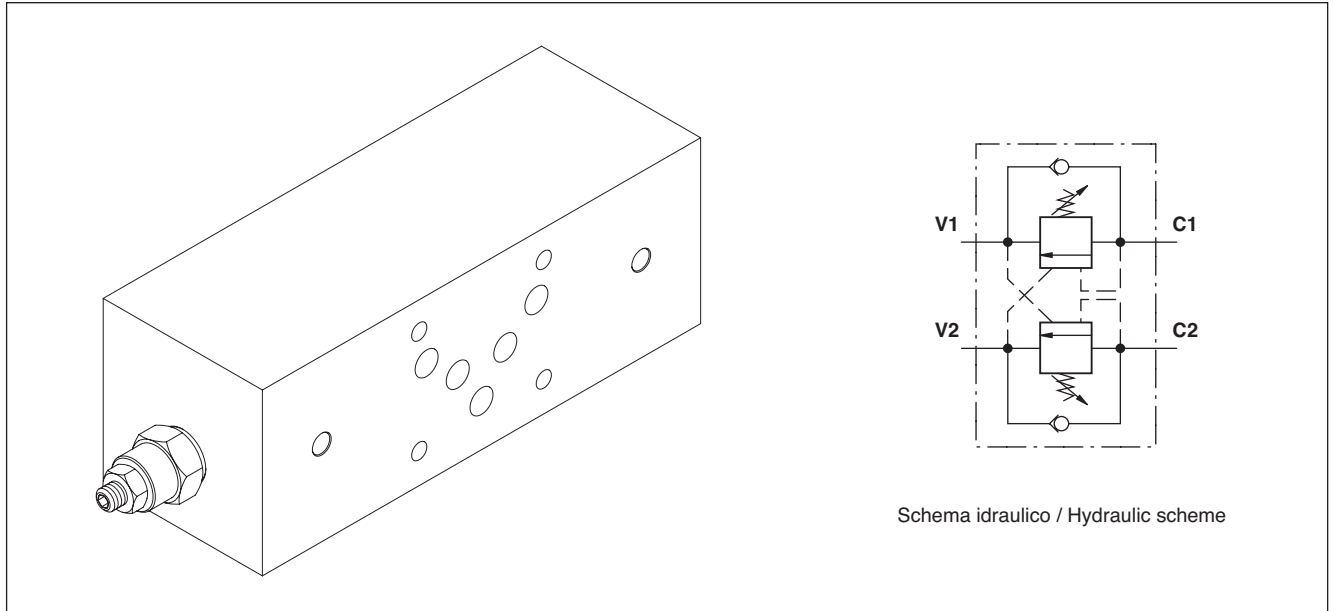


| Modello Type | Portata max Max flow l / min | Rapporto pilotaggio Pilot ratio | Pressione massima Max pressure bar |
|-----------------|------------------------------------|------------------------------------|--|
| OVC-DE-F-C5 | 80 | 4,25/1 | 350 |

A richiesta rapporti di pilotaggio 3/1, 8/1 e 10/1
Pilot ratios 3/1, 8/1 and 10/1 on request.

Tutti i dati forniti sono stati ottenuti usando olio con viscosità di circa 30cSt a 50°C. Campo di temperatura ammesso: -20°C, +90°C. Filtrazione assoluta: 25µ. I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
All performances and calibrations are carried out by using hydraulic oil with viscosity approx. 30cSt at 50°C. Temperature range: -20°C, +90°C. Filtration absolute: 25µ. The specifications are not binding, CBF reserves the right to introduce modifications without notice.

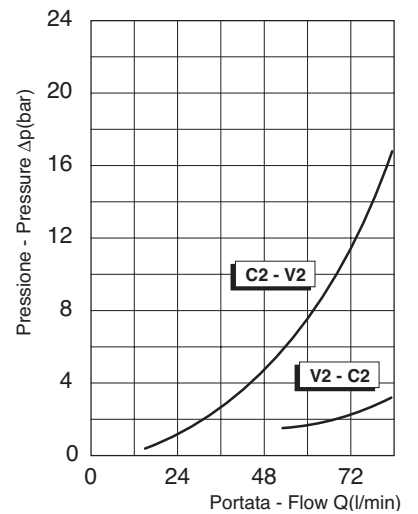

Sigla di ordinazione / Ordering code

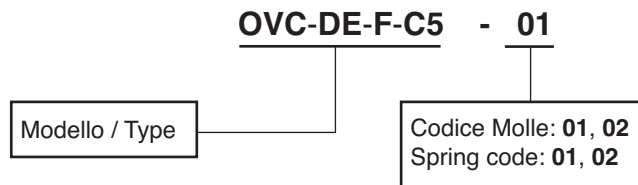

| Molle - Springs | | | |
|-----------------|--|---|------------------|
| Codice Code | Taratura standard Standard setting bar (Q=5 l/min) | Campo di taratura Adj. pressure range bar | Colore Colour |
| 01 | 100 | 20 ÷ 200 | Bianco / White |
| 02 | 280 | 50 ÷ 350 | Nero / Black |