


Cetop 3 and 5 Solenoid Valves with Manual Lever



TIMALCO HYDRAULICS

www.timalco.com.au

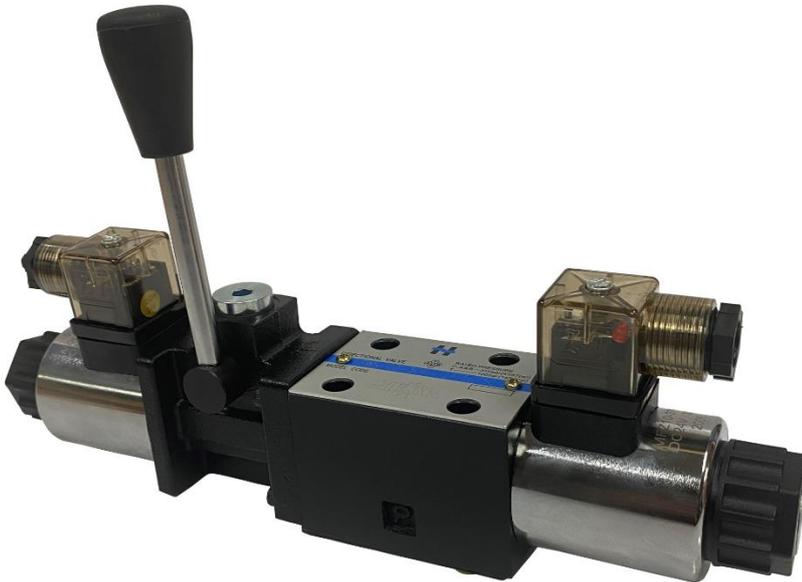


Standard Cetop 3 and Cetop 5 Electric Solenoid Valves are available with a manual lever operation.

Include high powered solenoid coils, various voltages and spool configurations. They are supplied with standard bolts and LED type connectors.


350 Bar max
High flow capabilities

Code Symbols


02 Dimensions

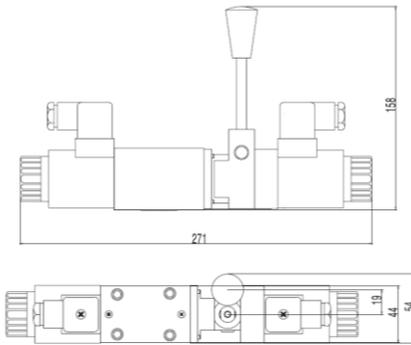


03 Dimensions

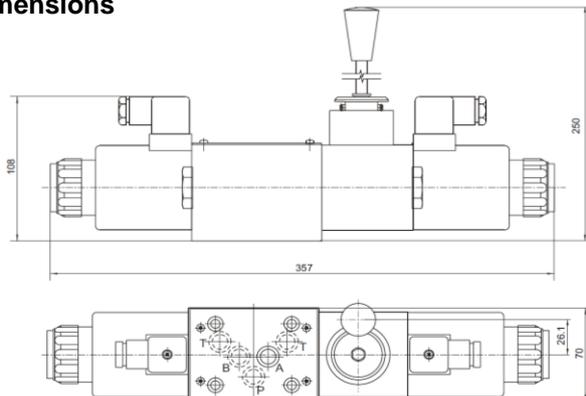


3C2




3C3



3C4



3C6



Typical Applications Include:

- Trucks
- Trailers/trailer ramps
- Cranes/ Construction equipment
- Agricultural Equipment



08 8262 4333



Timalco Hydraulics





timalcohyd

FWS Solenoid Valve with Manual Lever



www.timalco.com.au

Specifications

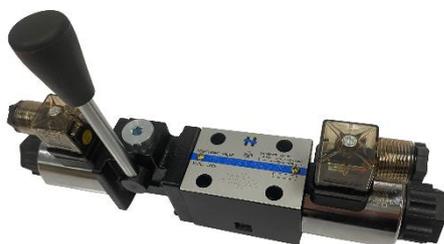

Model		02	03
Pressure Range (MPa)	Oil Port P, A, B	35	31.5
Max Flow rate (L/min)		80	120
Installation		Any, recommended horizontal installation	
Working Fluid		Mineral hydraulic oil, phosphate ester hydraulic oil	
Fluid Temp (°C)		-20 ~ 70	
Fluid Viscosity (mm ² /s)		2.8 ~ 100	
Working Voltage(V)	DC	12, 24, (220 RAC)	
	AC	110, 220	
Protection grade		IP65	
Filtration		NAS1638 Class 9, recommended filtration precision Minβ ₁₀ ≥75 ₀	

FWS - * - * - * * * / * * 50 *

Solenoid Valve with Manual Lever

Size

02 DN6
03 Dn10

Code Symbol

Refer to “code symbols”

Solenoid Voltage

D12 DC 12V
D24 DC 24V
A110 AC 110V
A220 AC 220V
B110 RAC 110Vrectified
B220 RAC 220Vrectified

Serial Number

Z5L Din Plug Connector with LED



08 8262 4333



Timalco Hydraulics



timalcohyd