


# TR4 Series Pressure Transducers



# TIMALCO HYDRAULICS


www.timalco.com.au

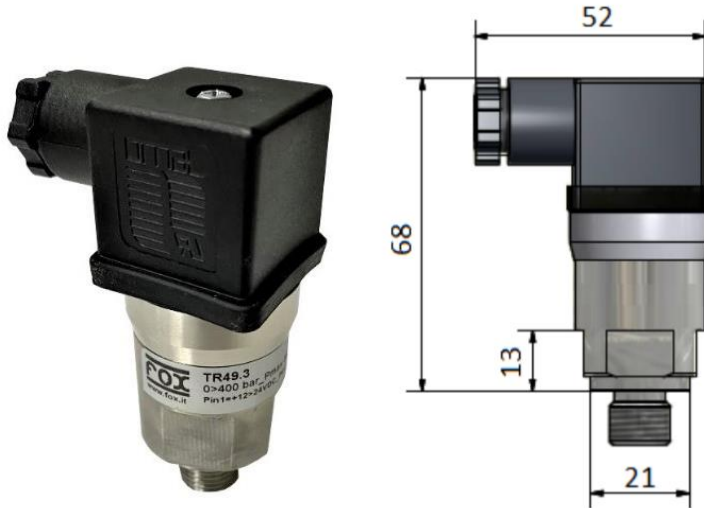

### Electric Connections:

4-20mA 2 Wires:  
Pin 1 Power Supply +  
Pin 2 Signal 4-20mA

0-10V 3 Wires:  
Pin 1 Power Supply +  
Pin 2 Signal 0-10V  
Pin 3 Gnd



### Features:

1/4" BSPF threaded male with integral ISO seal.

Power supply: 9 to 28V DC

4-20 mA 2 wires

0-10 Volt 3 wires

Stainless steel AISI 316, ceramic sensor and NBR seal.

Working temperature: -20°C ÷ + 80°C

Weight: 0.1 Kg

### TR4 Series Pressure Transducer 4-20mA

Part Number	Adjustable Pressure Range	Maximum Pressure	Supply Voltage	Electrical Connection	Port BSPF
TR40/2-M3	0-5 Bar	12	9-28 V DC	4-20mA 2 Wires	1/4" Male
TR41/2-M3	0-10 Bar	25			
TR42/2-M3	0-20 Bar	50			
TR43/2-M3	0-50 Bar	120			
TR44/2-M3	0-100 Bar	200			
TR45/2-M3	0-200 Bar	400			
TR49/2-M3	0-400 Bar	600			

### TR4 Series Pressure Transducer 0-10V DC

Part Number	Adjustable Pressure Range	Maximum Pressure	Supply Voltage	Electrical Connection	Port BSPF
TR40/3-M3	0-5 Bar	12	9-28 V DC	0-10V DC 3 Wires	1/4" Male
TR41/3-M3	0-10 Bar	25			
TR42/3-M3	0-20 Bar	50			
TR43/3-M3	0-50 Bar	120			
TR44/3-M3	0-100 Bar	200			
TR45/3-M3	0-200 Bar	400			
TR49/3-M3	0-400 Bar	600			



08 8262 4333



Timalco Hydraulics



timalcohyd