


LCVR-10-P

反向型单向阀

Direct-Acting, Poppet Reverse Type
Cartridge Check Valve

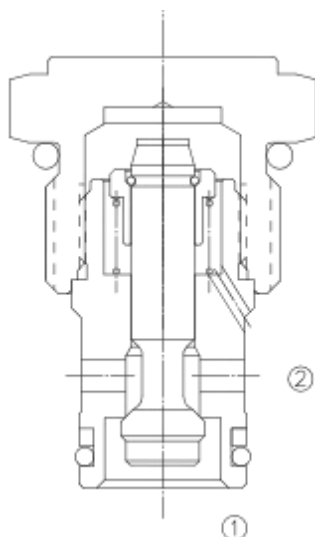

OPERATION

When pressure at ② rises above the spring bias pressure, the poppet is pushed from its seat and flow is allowed from ② to ①. The valve is closed (checked) from ① to ②.

当在②口的压力超过开启压力，②到①开启；
在反方向，①到②关闭；

FEATURES

特性

Hardened poppet and seat for long life.
Industry common cavity.
Compact size.

长寿命的阀。
工业通用插孔。
紧凑的结构。

SPECIFICATIONS

技术参数

Operating Pressure(工作压力): .350 Bar

Flow(流量): See PRESSURE DROP VS.FLOW graph..

Internal Leakage(内泄漏): 2 drops/min. max. at 350 Bar

Temperature(温度): -22°F to +250°F (-30°C to +120°C)

Fluids(流体): Mineral-based fluids.

For other fluid compatibility, consult factory.

Cavity(插孔): 10-2, see page 363

Body Material(阀块材料): Anodized 6061T6 aluminum


Alloy rated at 207 Bar

6061-T6, 允许使用最大压力207 Bar。


steel rated at 350 Bar.

钢材, 允许使用最大压力350 Bar。


SYMBOL



PRESSURE DROP VS. FLOW

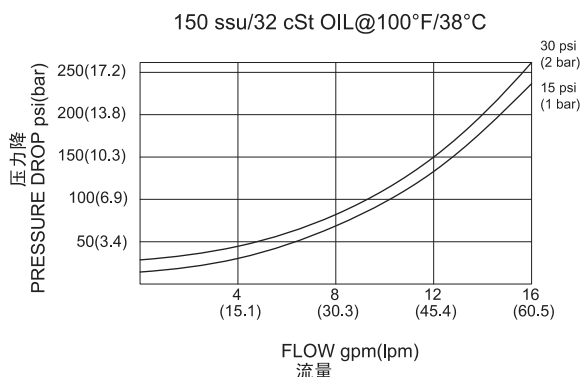

INSTALLATION DIMENSIONS

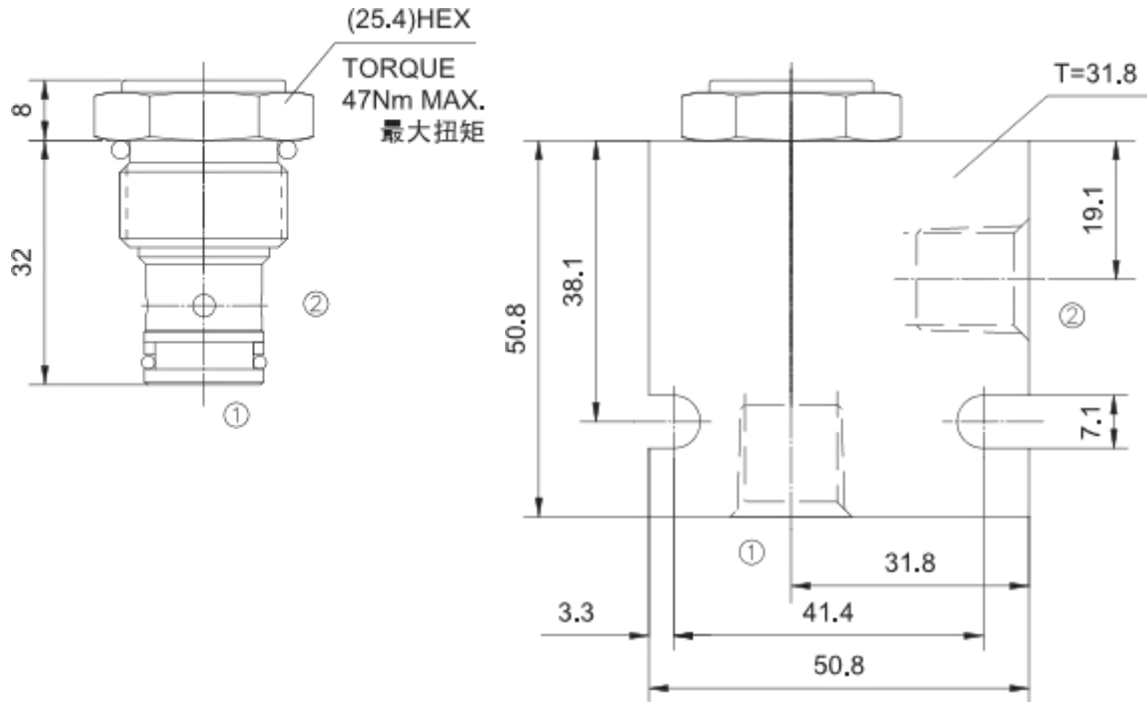

Unit=Millimeters

TO ORDER

